




MD2400 INTERFACE FOR SMS WITH GSM MODEM - Art. 243305 -

DATA SHEET

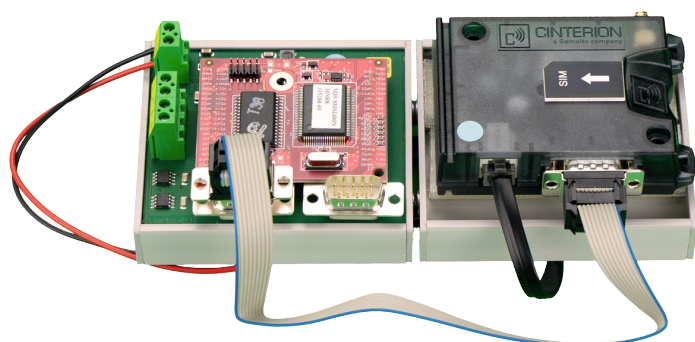

- Interface for sending SMS
- Supplied with GSM modem and antenna (2 metres cable)
- SIM card for GSM modem not included
- Supply voltage: 27Vdc
- Current consumption: 36mA@27Vdc



SUITABLE FOR : | MD2400L | MD2400 |

DESCRIPTION

The MD2400 interface for SMS sends all messages of the C.I.E. MD2400L or the C.I.E. MD2400 in the form of an SMS to up to 10 telephone numbers and is supplied as standard with a GSM modem with antenna.

The 10 telephone numbers are programmed using a separate configuration software. Phone number 1 receives all messages. Numbers 2 to 10 always receive "Fire alarm" messages and can be blocked for pre-alarm and fault messages.

The text message includes the following information:

- Specific message: "Fire alarm", "Detector open", "Peripheral fault", etc.
- The loop number
- The group name
- The detector address
- The detector name
- The project name

The interface is connected directly to the I/O bus of the C.I.E. MD2400L or the C.I.E. MD2400.

