



XP95 I.S. GALVANIC BARRIER AND PROTOCOL TRANSLATOR IN HOUSING

- Art. 085701 -

DATASHEET

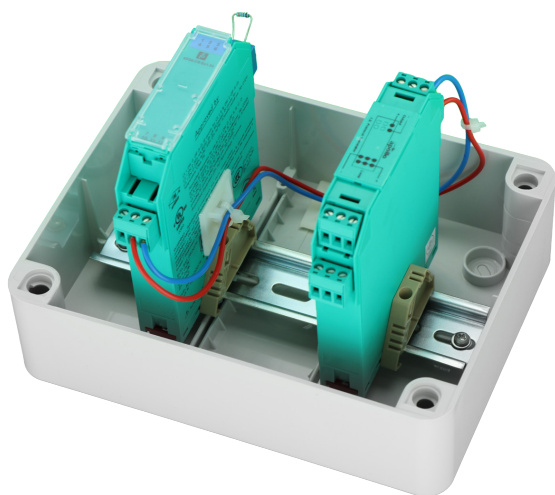

- Should always be used in combination with the XP95 I.S. fire detectors
- The XP95 galvanic barrier is installed in the safe area and limits the power sent into the hazardous area
- The XP95 protocol translator ensures the integrity of communication between the XP95 loop interface card and the connected XP95 I.S. detectors
- Mounted in plastic housing 190x140x140mm
- Maximum 20 XP95 I.S. detectors per XP95 galvanic barrier with protocol translator
- Maximum 4 XP95 galvanic barrier with protocol translator per XP95 loop interface card

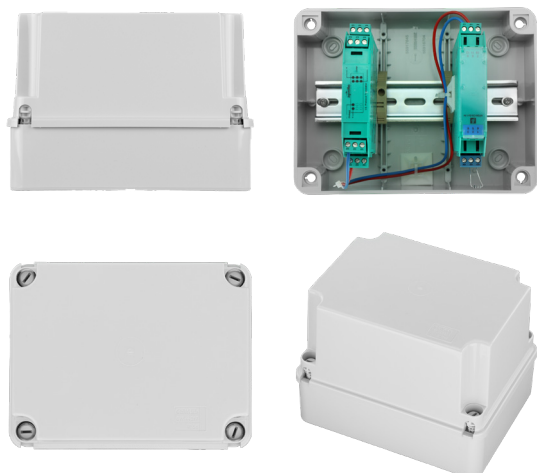

SUITABLE FOR : | MD2400L | MD2400 |



EN54-13 CERTIFICATE : MD2400/MD2400L: B-9072-FD-954

Changes can be made without prior notice